

C/N:HLK

P/C:HLK-527-1





P/N:HLK-527-1

CUSTOMER REV:

APPROVED BY:

REVISIONS

REV.	DESCRIPTION	DATE	SIGANTURE
△A			
△B			
△C			

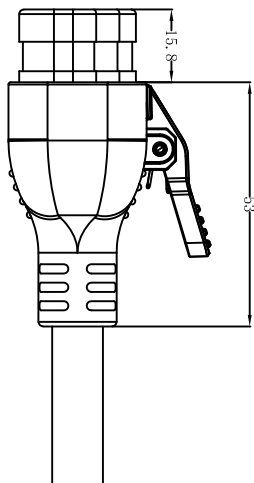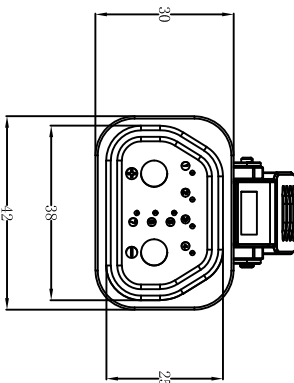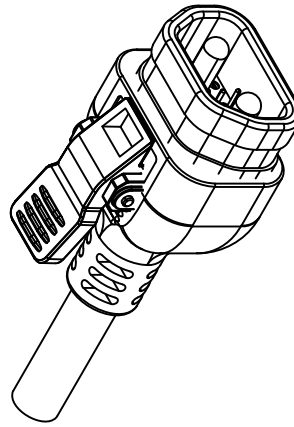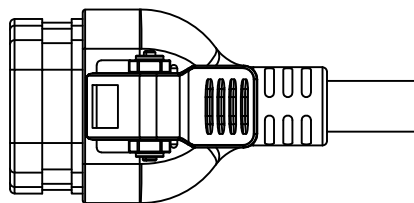

SPECIFICATION

Rated Operating Voltage	2PIN*500V+8PIN*100V AC
Rated Current	2PIN*100A+8PIN*3A
Peak Current	N/A
Insulation Resistance	500MQ/500V DC
Withstand Voltage/AC	2500V Power/1500Vsignal
Durability	5000 Cycles
IP Rating	Mated:IP67 Unmated:N/A
Salt Spray	5% NaCl, 48H
Flame Class	UL94 V-0 (Materials)
Operating Temperature	-40℃~105℃
UV Resistance Grade	N/A
Mating Part No	HLK-528
Maximum Cable Range	OD≤18.5mm

TERMS OF BUSINESS

MOQ	1PCS
Lead Time	1-2 Weeks
HS Code	8544422100
Warrenty	1 Year
Terms of Payment	T/T 100%
Terms of Shipment	EX Works

UNMARED TOLERANCE DEFINATION

0~5	±0.2
5~15	±0.3
15~30	±0.5
30~100	±0.8
100~300	±1.0
300~1000	±1.2

SIGNATURE

ENGINEER BY: Li Ningning

MANAGER BY: John Han

CHECKED BY: David Wang

SEALS BY: Eleven Wang

HONLIX[®] HONLIX INC.
 HTTP://WWW.HONLIX.COM

PRODUCT NO:HLK-XXX DATE: 2024.11.19

UNIT: mm SHEET: 1 OF 1 REV.

H/C: HLK-527-1

0

NO.	ITEM	DESCRIPTION	QTY
①	HLK-527-1	HLK-527-1 2+7PIN Male Charging Connector	1PCS

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO HONLIX. ANY USE OR DISCLOSURE OF THIS INFORMATION, EXCEPT FOR THE EXCLUSIVE BENEFIT OF HONLIX IS PROHIBITED.