

HONLIX


4系电动工具连接器线束组件 4 Series_Power Tool Connectors



Electric Forklift Truck/电动叉车



Electric Lawn Mower/电动割草机

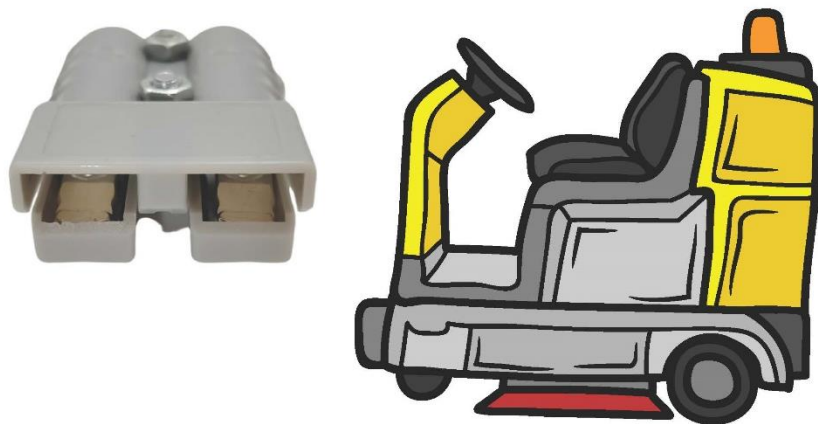

Power Scrubber/电动洗地机



Electric Farm Machinery/电动农机

公司简介

Company Profile

HONLIX

弘林科电工科技（昆山）有限公司成立于2016年，坐落于中国昆山市张浦镇德国工业园区内，工厂位于江苏昆山和河南南阳。公司专注于新能源电动自行车/滑板车/平衡车，电动摩托车，电动汽车整体连接解决方案，为客户提供一站式解决方案。

公司拥有专业的研发团队+销售团队+制造团队+品保团队，可提供整套连接器，线束组件的设计方案及选型建议，为客户提供优质的产品和快速的交期，具有良好的市场竞争力，得到广大客户的支持和信赖

公司已经通过ISO9001:2015质量管理体系认证，IATF16949：2016正在规划中，拥有国家专利20余项，产品认证已通过ROHS REACH CE CCC等。

HONLIX Electrician Technology (Kunshan) Co., Ltd. was established in 2016 and is located in the German Industrial Park, Zhangpu Town, Kunshan City, China. The factories are located in Kunshan, Jiangsu and Nanyang, Henan. The company focuses on the overall connection solutions of new energy electric bicycles/scooters/balance vehicles, electric motorcycles, and electric vehicles, providing customers with one-stop solutions.

The company has a professional R & D team + sales team + manufacturing team + quality assurance team, can provide a complete set of connectors, wiring harness components design solutions and selection suggestions, to provide customers with high-quality products and fast delivery, with good market competition We have won the support and trust of our customers.

The company has passed ISO9001:2015 quality management system certification, IATF16949:2016 is under planning, has more than 20 national patents, and product certification has passed ROHS, REACH, CE, CCC, etc.

工厂照片 KS/HN Factory



KUN SHAN Factory



HE NAN Factory

资质证书 Company Certificate

HONLIX



Business License



Letter of Credit



Chinese/English Trademark Certificate



ISO9001:2015



CCC Certificate



ROHS Certificate



CE Certificate



More than 20 Patent Certificates



目 录一

CONTENS

HONLIX

A. 50A 2PIN+4PIN-----	7~7
B. 175A 2PIN+4PIN-----	8~8
C. 350A 2PIN+4PIN-----	9~9
D. 80A 2PIN+4PIN-----	10~11
E. 160A 2PIN+4PIN-----	12~13
F. 320A 2PIN+4PIN-----	14~15



HLK-401

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-401
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
General features: 一般特性:	
Product Name 产品名称	50A 2PIN
Product Spec 规格型号	2PIN Female Connector
Connector locking system 互锁	N/A
Ingree of protection ratings 防护等级	IP23
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8544422100
Environmental compliance 环保等级	RoHs, Reach
Electrical parameters: 电气参数:	
Rated voltage 电压等级	600V
Rated current(25°C) 额定工作电流	50A
Withstand voltage 耐电压	2500V
Contact resistance 接触电阻	≤10mΩ
Insulation resistance 绝缘电阻	≥20MΩ
Mechanical performance: 机械参数:	
Mechanical life 插拔寿命	≤5000 mating cycles
Insertion force 插入力	≤20N
Pull out force 拔出力	≥3N
Insertion force 配线范围	6.0m2
Application Area应用领域:	
Lithium battery charge/discharge connection 锂电池充、放电连接领域	



HLK-402

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-402
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
General features: 一般特性:	
Product Name 产品名称	175A 2PIN
Product Spec 规格型号	2PIN Female Connector
Connector locking system 互锁	N/A
Ingree of protection ratings 防护等级	IP23
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8544422100
Environmental compliance 环保等级	RoHs, Reach
Electrical parameters: 电气参数:	
Rated voltage 电压等级	600V
Rated current(25°C) 额定工作电流	175A
Withstand voltage 耐电压	2500V
Contact resistance 接触电阻	≤10mΩ
Insulation resistance 绝缘电阻	≥20MΩ
Mechanical performance: 机械参数:	
Mechanical life 插拔寿命	≤5000 mating cycles
Insertion force 插入力	≤20N
Pull out force 拔出力	≥3N
Insertion force 配线范围	35m2
Application Area 应用领域:	
Lithium battery charge/discharge connection 锂电池充、放电连接领域	



HLK-403

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-403
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
General features: 一般特性:	
Product Name 产品名称	350A 2PIN
Product Spec 规格型号	2PIN Female Connector
Connector locking system 互锁	N/A
Ingree of protection ratings 防护等级	IP23
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8544422100
Environmental compliance 环保等级	RoHs, Reach
Electrical parameters: 电气参数:	
Rated voltage 电压等级	600V
Rated current(25°C) 额定工作电流	350A
Withstand voltage 耐电压	2500V
Contact resistance 接触电阻	≤10mΩ
Insulation resistance 绝缘电阻	≥20MΩ
Mechanical performance: 机械参数:	
Mechanical life 插拔寿命	≤5000 mating cycles
Insertion force 插入力	≤20N
Pull out force 拔出力	≥3N
Insertion force 配线范围	35m2
Application Area应用领域:	
Lithium battery charge/discharge connection 锂电池充、放电连接领域	



HLK-404

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-404
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
General features: 一般特性:	
Product Name 产品名称	Power 80A 2PIN+Signal 10A 4PIN
Product Spec 规格型号	Power 2PIN*Signal 4PIN Male Connector
Connector locking system 互锁	N/A
Ingree of protection ratings 防护等级	IP23
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8544422100
Environmental compliance 环保等级	RoHs, Reach
Electrical parameters: 电气参数:	
Rated voltage 电压等级	150V
Rated current(25°C) 额定工作电流	80A
Withstand voltage 耐电压	2500V
Contact resistance 接触电阻	≤10mΩ
Insulation resistance 绝缘电阻	≥20MΩ
Mechanical performance: 机械参数:	
Mechanical life 插拔寿命	≤5000 mating cycles
Insertion force 插入力	≤20N
Pull out force 拔出力	≥3N
Insertion force 配线范围	16m2
Application Area应用领域:	
Lithium battery charge/discharge connection 锂电池充、放电连接领域	



HLK-405

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-405
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
General features: 一般特性:	
Product Name 产品名称	Power 80A 2PIN+Signal 10A 4PIN
Product Spec 规格型号	Power 2PIN*Signal 4PIN Female Connector
Connector locking system 互锁	N/A
Ingree of protection ratings 防护等级	IP23
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8544422100
Environmental compliance 环保等级	RoHs, Reach
Electrical parameters: 电气参数:	
Rated voltage 电压等级	150V
Rated current(25°C) 额定工作电流	80A
Withstand voltage 耐电压	2500V
Contact resistance 接触电阻	≤10mΩ
Insulation resistance 绝缘电阻	≥20MΩ
Mechanical performance: 机械参数:	
Mechanical life 插拔寿命	≤5000 mating cycles
Insertion force 插入力	≤20N
Pull out force 拔出力	≥3N
Insertion force 配线范围	16m2
Application Area应用领域:	
Lithium battery charge/discharge connection 锂电池充、放电连接领域	



HLK-406

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-406
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
General features: 一般特性:	
Product Name 产品名称	Power 160A 2PIN+Signal 10A 4PIN
Product Spec 规格型号	Power 2PIN*Signal 4PIN Male Connector
Connector locking system 互锁	N/A
Ingree of protection ratings 防护等级	IP23
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8544422100
Environmental compliance 环保等级	RoHs, Reach
Electrical parameters: 电气参数:	
Rated voltage 电压等级	150V
Rated current(25°C) 额定工作电流	160A
Withstand voltage 耐电压	2500V
Contact resistance 接触电阻	≤10mΩ
Insulation resistance 绝缘电阻	≥20MΩ
Mechanical performance: 机械参数:	
Mechanical life 插拔寿命	≤5000 mating cycles
Insertion force 插入力	≤20N
Pull out force 拔出力	≥3N
Insertion force 配线范围	16m2
Application Area应用领域:	
Lithium battery charge/discharge connection 锂电池充、放电连接领域	



HLK-407

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-407
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
General features: 一般特性:	
Product Name 产品名称	Power 160A 2PIN+Signal 10A 4PIN
Product Spec 规格型号	Power 2PIN*Signal 4PIN Female Connector
Connector locking system 互锁	N/A
Ingree of protection ratings 防护等级	IP23
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8544422100
Environmental compliance 环保等级	RoHs, Reach
Electrical parameters: 电气参数:	
Rated voltage 电压等级	150V
Rated current(25°C) 额定工作电流	160A
Withstand voltage 耐电压	2500V
Contact resistance 接触电阻	≤10mΩ
Insulation resistance 绝缘电阻	≥20MΩ
Mechanical performance: 机械参数:	
Mechanical life 插拔寿命	≤5000 mating cycles
Insertion force 插入力	≤20N
Pull out force 拔出力	≥3N
Insertion force 配线范围	16m2
Application Area应用领域:	
Lithium battery charge/discharge connection 锂电池充、放电连接领域	



HLK-408

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-408
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
General features: 一般特性:	
Product Name 产品名称	Power 320A 2PIN+Signal 10A 4PIN
Product Spec 规格型号	Power 2PIN*Signal 4PIN Male Connector
Connector locking system 互锁	N/A
Ingree of protection ratings 防护等级	IP23
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8544422100
Environmental compliance 环保等级	RoHs, Reach
Electrical parameters: 电气参数:	
Rated voltage 电压等级	150V
Rated current(25°C) 额定工作电流	320A
Withstand voltage 耐电压	2500V
Contact resistance 接触电阻	≤10mΩ
Insulation resistance 绝缘电阻	≥20MΩ
Mechanical performance: 机械参数:	
Mechanical life 插拔寿命	≤5000 mating cycles
Insertion force 插入力	≤20N
Pull out force 拔出力	≥3N
Insertion force 配线范围	16m2
Application Area应用领域:	
Lithium battery charge/discharge connection 锂电池充、放电连接领域	



HLK-409

Brand: 品牌:	HONLIX 弘林科
P/N: 料号	HLK-409
MOQ: 起订量	500PCS/Order 500条/次
Place of Origin: 产地	Kunshan City,China 中国昆山
Delivery Time: 交货周期	1 week 1周
Export Port: 发出港口	Shanghai 上海
General features: 一般特性:	
Product Name 产品名称	Power 160A 2PIN+Signal 10A 4PIN
Product Spec 规格型号	Power 2PIN*Signal 4PIN Female Connector
Connector locking system 互锁	N/A
Ingree of protection ratings 防护等级	IP23
Ambient temperature(operation) 耐温	-25°C~+85°C
Customs tariff number 海关编码	8544422100
Environmental compliance 环保等级	RoHs, Reach
Electrical parameters: 电气参数:	
Rated voltage 电压等级	150V
Rated current(25°C) 额定工作电流	320A
Withstand voltage 耐电压	2500V
Contact resistance 接触电阻	≤10mΩ
Insulation resistance 绝缘电阻	≥20MΩ
Mechanical performance: 机械参数:	
Mechanical life 插拔寿命	≤5000 mating cycles
Insertion force 插入力	≤20N
Pull out force 拔出力	≥3N
Insertion force 配线范围	16m2
Application Area应用领域:	
Lithium battery charge/discharge connection 锂电池充、放电连接领域	

HONLIX

Thanks!

www.honlix.com