

C/N:HLK

P/C:HLK-401

P/N:HLK-401

CUSTOMER REV:

APPROVED BY:

REV.

DESCRIPTION





DATE

SIGNATURE

REVISIONS

REV.	DESCRIPTION	DATE	SIGNATURE
△			
△			
△			

The remaining

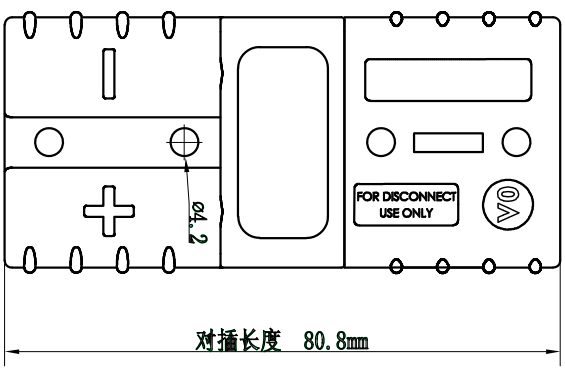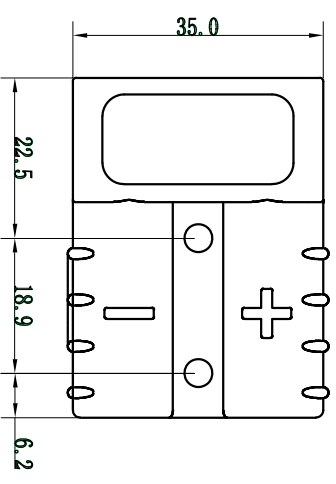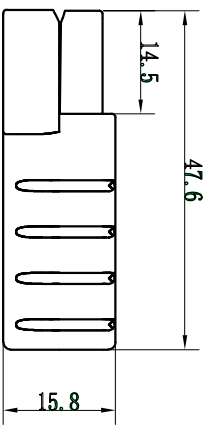


#10/12

#8

#6

Standard Equipment

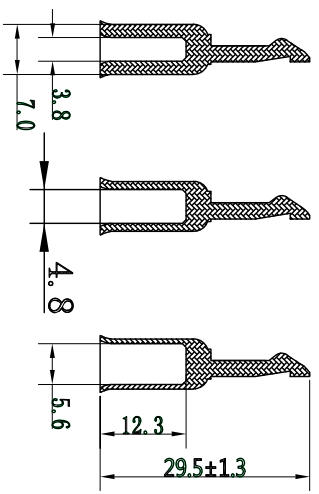

SPECIFICATION	
Rated Operating Voltage	600V
Rated Current	50A
Peak Current	60A
Insulation Resistance	500MΩ/600V DC
Withstand Voltage/AC	2500V Power/1500V/Signal
Durability	5000 Cycles
IP Rating	Material:P23 Unrated:N/A
Salt Spray	5% NaCl, 24H
Flame Class	UL94 V-0 (Metals)
Operating Temperature	-40C~105C
UV Resistance Grade	N/A
Mating Part No	/
Maximum Cable Range	OD≤16mm

TERMS OF BUSINESS	
MOQ	1PCS
Lead Time	1-2 Weeks
HS Code	8544422100
Warrenty	1 Year
Terms of Payment	T/T 100%
Terms of Shipment	EX Works

UNMARED TOLERANCE DEFINATION	
0~5	±0.2
5~15	±0.3
15~30	±0.5
30~100	±0.8
100~300	±1.0
300~1000	±1.2

SIGNATURE

ENGINEER BY: Mandy Hao

MANAGER BY: John Han

CHECKED BY: David Wang

SEALES BY: Eleven Wang

 HONLIX INC.
 HTTP://WWW.HONLIX.COM

PRODUCT NO:HLK-XXX

DATE: 2024.12.11

UNIT: mm

SHEET: 1 OF 1

H/C: HLK-401

REV. 0

NO.	ITEM	DESCRIPTION	QTY
①	HLK-401	HLK-401+2PIN 50A connector	1PCS

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO HONLIX. ANY USE OR DISCLOSURE OF THIS INFORMATION, EXCEPT FOR THE EXCLUSIVE BENEFIT OF HONLIX IS PROHIBITED.