

C/N:HLK

P/C:HLK-408

P/N:HLK-408

CUSTOMER REV:

APPROVED BY:











REV.

DESCRIPTION

DATE

SIGNATURE

REV.	DESCRIPTION	DATE	SIGNATURE
△			
△			
△			

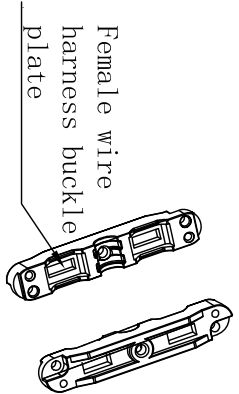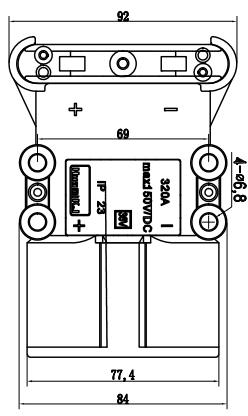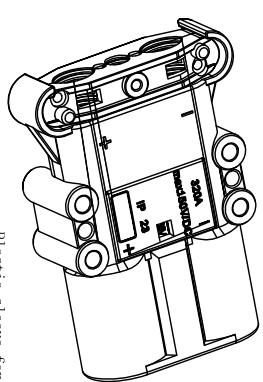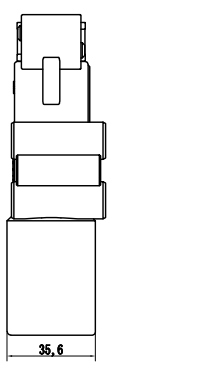

Upper auxiliary needle  
X2+Lower auxiliary needle  
X2 (Trocar needle)

Terminal X2

**SPECIFICATION**

Rated Operating Voltage	150V
Rated Current	Power320A*2C+Signal10A*4C
Peak Current	352A/3Seconds
Insulation Resistance	500MΩ/150V DC
Withstand Voltage/AC	2500V Power/1500VSignal
Durability	5000 Cycles
IP Rating	Mated:IP23 Unmated:N/A
Salt Spray	5% NaCl, 24H
Flame Class	UL94 V-0 (Materials)
Operating Temperature	-40℃~125℃
UV Resistance Grade	N/A
Mating Part No	HLK-409
Maximum Cable Range	0D≤70mm

**TERMS OF BUSINESS**

MOQ	1PCS
Lead Time	1-2 Weeks
HS Code	8544422100
Warrenty	1 Year
Terms of Payment	T/T 100%
Terms of Shipment	EX Works

**UNMARED TOLERANCE DEFINATION**

0~5	±0.2
5~15	±0.3
15~30	±0.5
30~100	±0.8
100~300	±1.0
300~1000	±1.2

**HONLIX**

HONLIX INC.  
HTTP://WWW.HONLIX.COM

SIGNATURE	
ENGINEER BY:	Mandy Hoo
MANAGER BY:	John Han
CHECKED BY:	David Wang
SEALS BY:	Eleven Wang

PRODUCT NO:HLK-XXX	DATE: 2024.12.11
UNIT: mm	SHEET: 1 OF 1
H/C: HLK-408	REV. 0

NO.	ITEM	DESCRIPTION	QTY
①	HLK-408	HLK-408 Power320A*2PIN+Signal10A*2PIN Male Connector	1PCS

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO HONLIX. ANY USE OR DISCLOSURE OF THIS INFORMATION, EXCEPT FOR THE EXCLUSIVE BENEFIT OF HONLIX IS PROHIBITED.