C/N: HLK	P/C:HLK-409	P/N:HLK-409	CUSTOMER REV:	APPROVED BY:

REVISIONS			
REV.	DESCRIPTION	DATE	SIGANTURE
A			
B			
C			

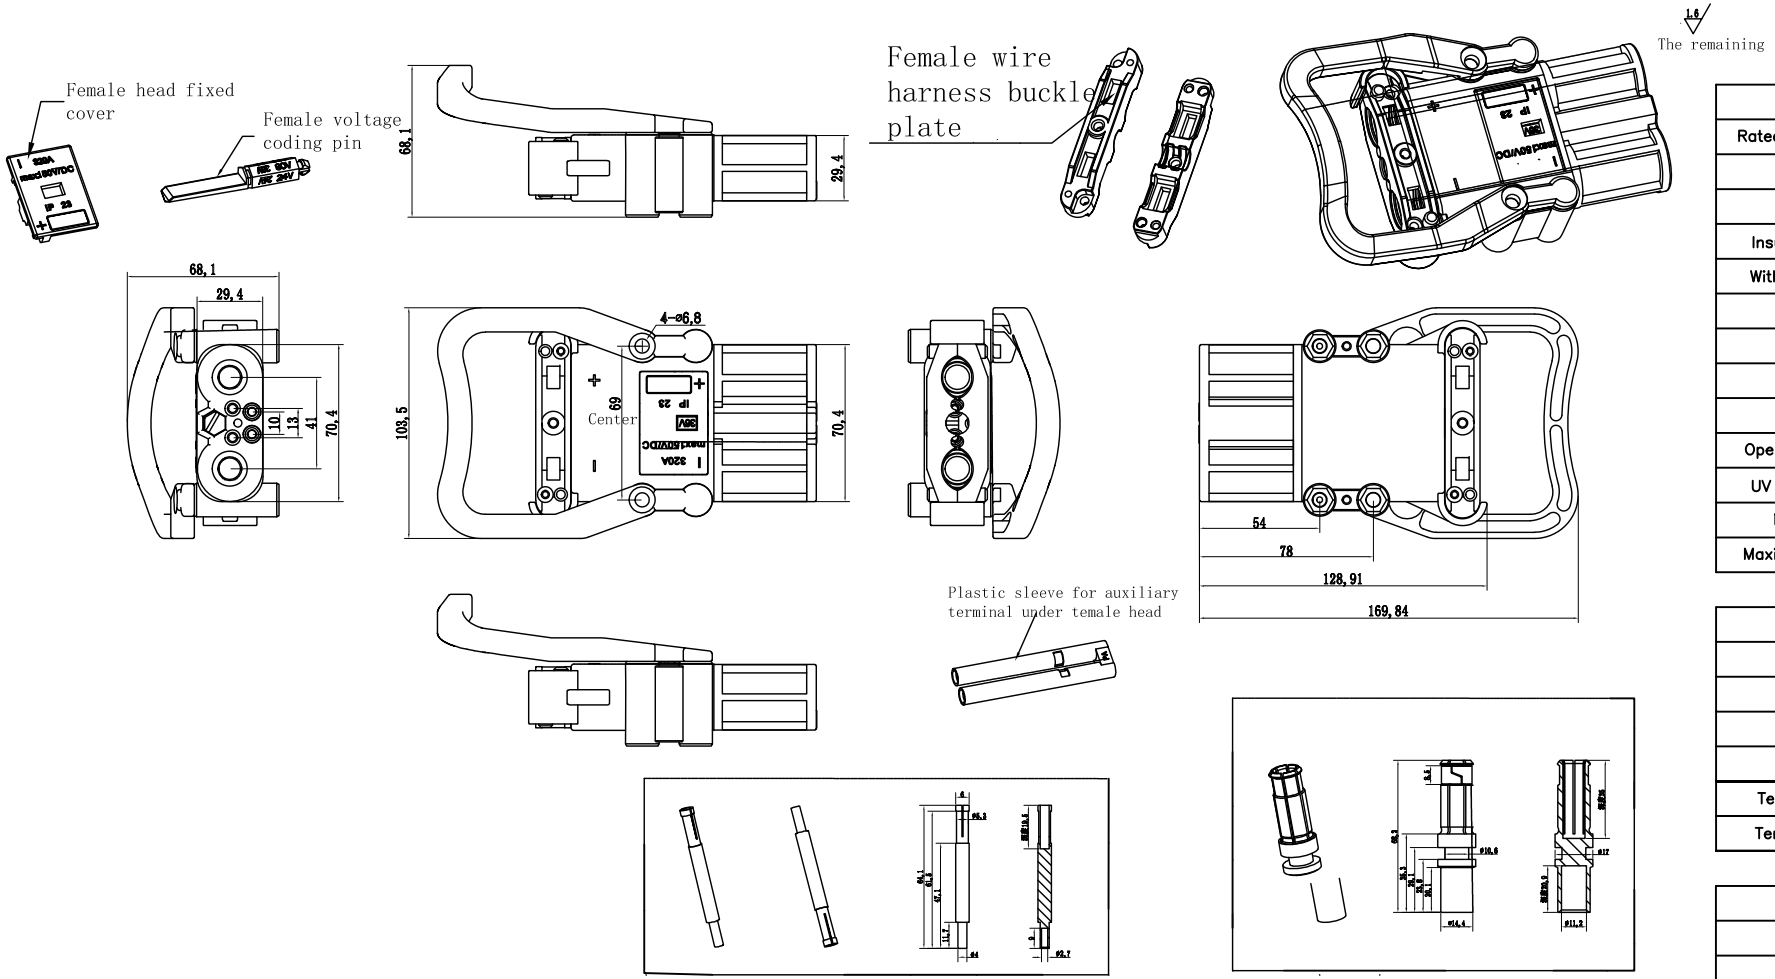

Upper auxiliary needle
+Lower auxiliary needle

Terminal X2

SPECIFICATION	
Rated Operating Voltage	150V
Rated Current	Power320A*2C+Signal10A*4C
Peak Current	352A/3Seconds
Insulation Resistance	500MΩ/150V DC
Withstand Voltage/AC	2500V Power/1500VSignal
Durability	5000 Cycles
IP Rating	Mated:IP23 Unmated:N/A
Salt Spray	5% NaCl, 24H
Flame Class	UL94 V-0 (Materinals)
Operating Temperature	-40℃~125℃
UV Resistance Grade	N/A
Mating Part No	HLK-408
Maximum Cable Range	OD≤70mm

TERMS OF BUSINESS	
MOQ	1PCS
Lead Time	1-2 Weeks
HS Code	8544422100
Warrenty	1 Year
Terms of Payment	T/T 100%
Terms of Shipment	EX Works

UNMARED TOLERANCE DEFINATION	
0~5	±0.2
5~15	±0.3
15~30	±0.5
30~100	±0.8
100~300	±1.0
300~1000	±1.2

SIGNATURE	
ENGINEER BY:	Mandy Hao
MANAGER BY:	John Han
CHECKED BY:	David Wang
SEALES BY:	Eleven Wang

HONLIX®
HONLIX INC.
HTTP://WWW.HONLIX.COM

PRODUCT NO:HLK-XXX		DATE: 2024.11.19	
UNIT: mm	SHEET: 1 OF 1		REV.
H/C: HLK-409			0

NO.	ITEM	DESCRIPTION	QTY
①	HLK-409	HLK-409 Power320A*2PIN+Signal10A*2PIN Female Connector	1PCS

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO HONLIX. ANY USE OR DISCLOSURE OF THIS INFORMATION, EXCEPT FOR THE EXCLUSIVE BENEFIT OF HONLIX IS PROHIBITED.